


**KEY**

1. Movement joint
2. Quinn Lite blockwork

**NOTE**

It is not normally necessary to include movement joints in the internal walls and the inner leaf of the external walls of dwellings unless the walls are longer than about three times their height. In the external leaf of dwellings and in the walls of industrial and commercial buildings, movement joints should be inserted in accordance with BS 5628 and IS 325. Generally, a movement joint should be inserted every 5 to 6 metres.

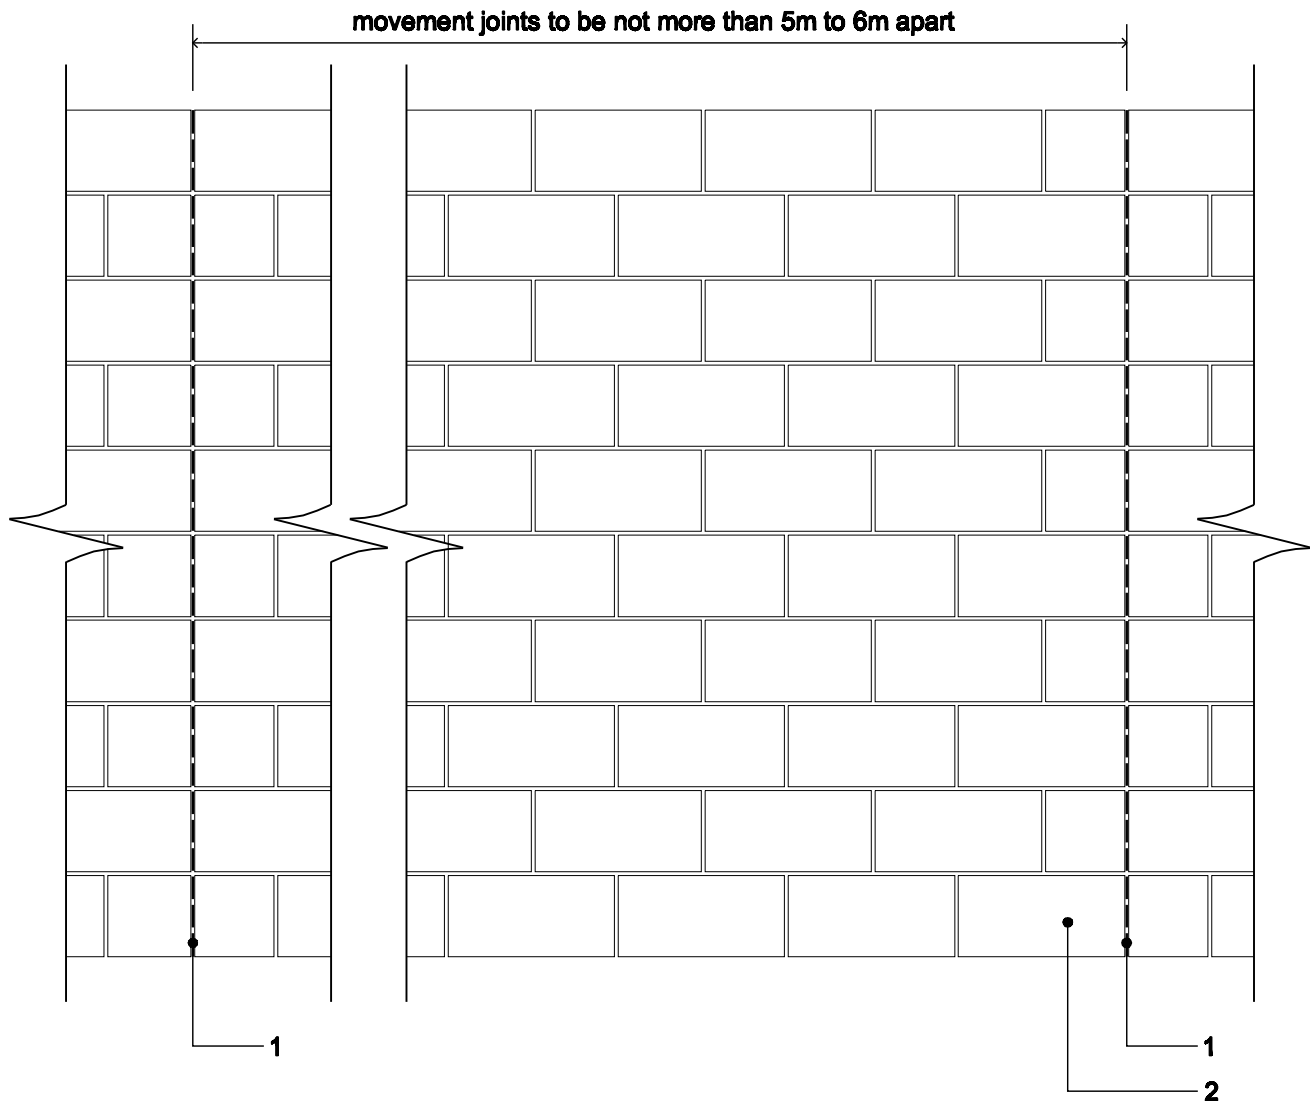

<b>PROJECT</b>	<b>DRAWING TITLE</b> Movement Joints	<b>DRAWING NO.</b>	<b>REVISION</b>
copyright© The information is supplied in good faith and no liability can be accepted for any loss or damage resulting from use.	<b>QUINN REF</b> QL-TD-021	<b>DATE</b>	<b>SCALE</b> 1.20
<b>QUINN</b> group	Quinn Group, Head Office, Derrylin, Co. Fermanagh, BT92 9AU Tel:+44 (0) 28 6774 8866 Fax: +44 (0) 28 6774 8800 Email: General Enquires: info@quinn-group.com Technical Enquires: technical@quinn-group.com		