


KEY

1. 300mm wide Quinn Lite foundation block B5 or B7 (B3 subject to site investigation)
2. Hardcore
3. Sand blinding
4. Radon barrier
5. Quinn Prestressed Floor Slab
6. Quinn Therm floor insulation
7. Damp Proof Membrane
8. Screed
9. External plaster 1:1:6 cement, lime, mortar or 6:1 sand, cement with suitable plasticizer
10. Damp proof course
11. Flexible wall tie, butterfly or double triangle - BS1234 1978 or EN 845-1
12. 100mm B5 blockwork

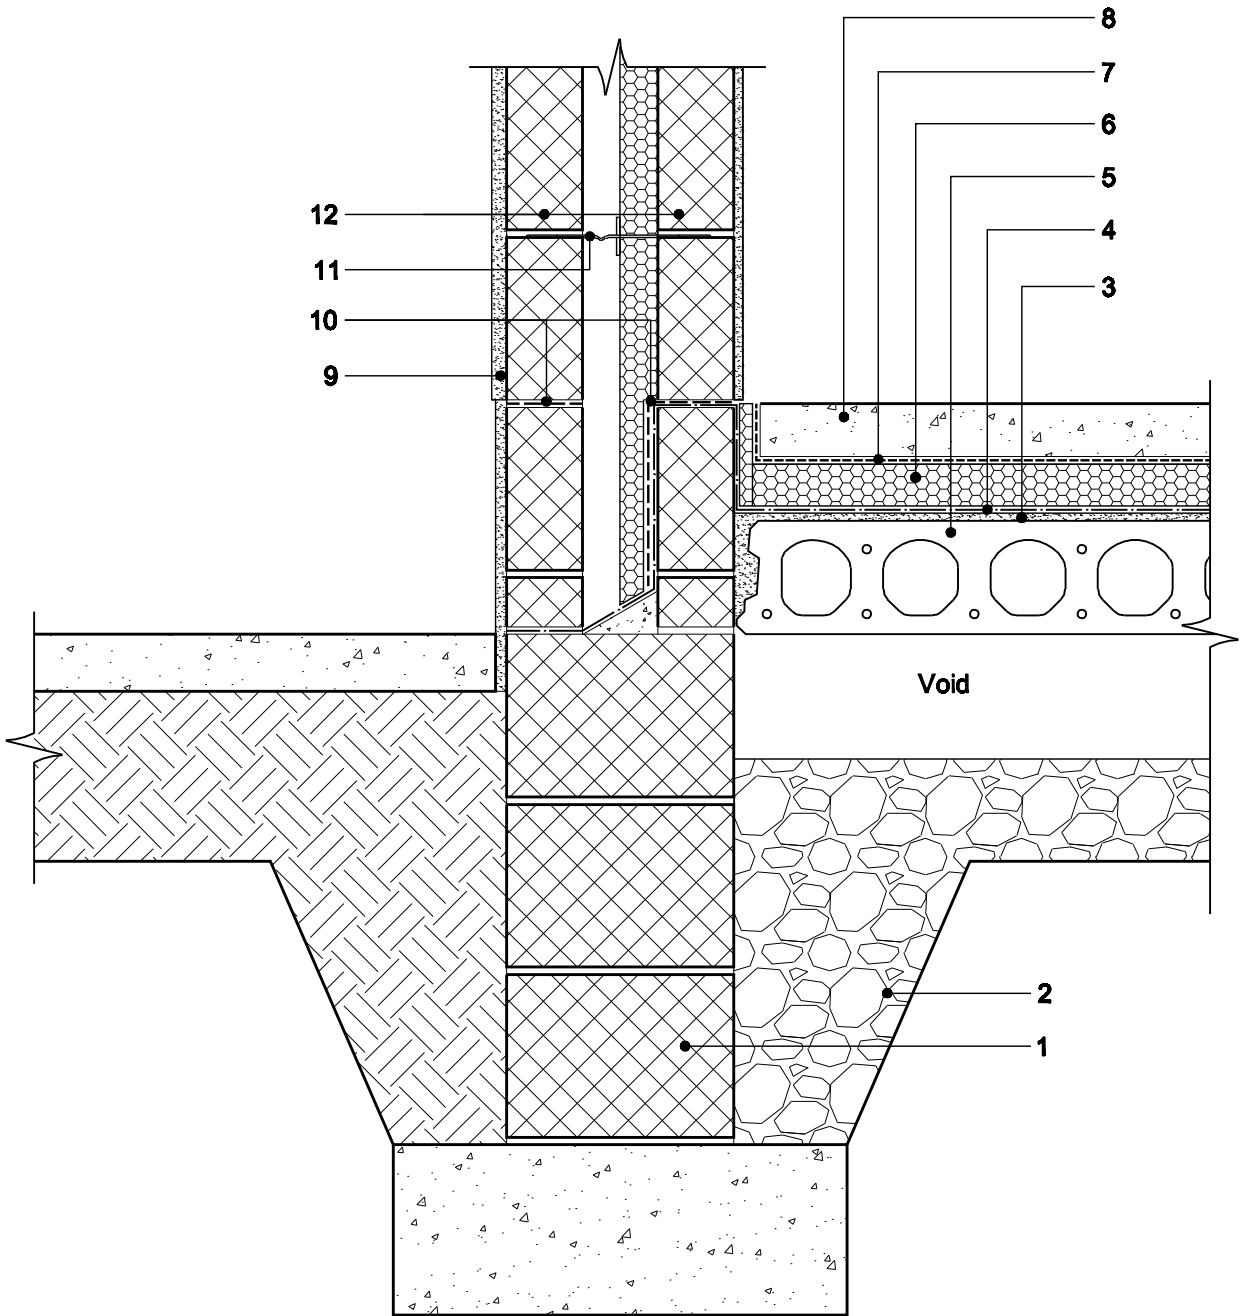

PROJECT	DRAWING TITLE Quinn Lite Foundation Block (showing precast suspended floor)	DRAWING NO.	REVISION
copyright© The information is supplied in good faith and no liability can be accepted for any loss or damage resulting from use.	QUINN REF QL-TD-002	DATE	SCALE 1.10
QUINN group	Quinn Group, Head Office, Derrylin, Co. Fermanagh, BT92 9AU Tel: +44 (0) 28 6774 8866 Fax: +44 (0) 28 6774 8800 Email: General Enquires: info@quinn-group.com Technical Enquires: technical@quinn-group.com		