



KEY

- 1. 100mm Dense concrete blockwork
- 2. Flexible wall tie, butterfly or double triangle - BS1234 1978 or EN 845-1
- 3. 20mm external render
- 4. DPC
- 5. Window Frame
- 6. 12.5mm plasterboard on dabs or battens
- 7. 25mm Quinn Therm QW insulation
- 8. 60mm Quinn Therm QW insulation
- 9. 100mm Quinn Lite B5 blockwork

THERMAL BRIDGING NOTE

Quinn Lite Thermal blocks reduces thermal bridging at window reveals thus omitting the need for proprietary cavity closers.

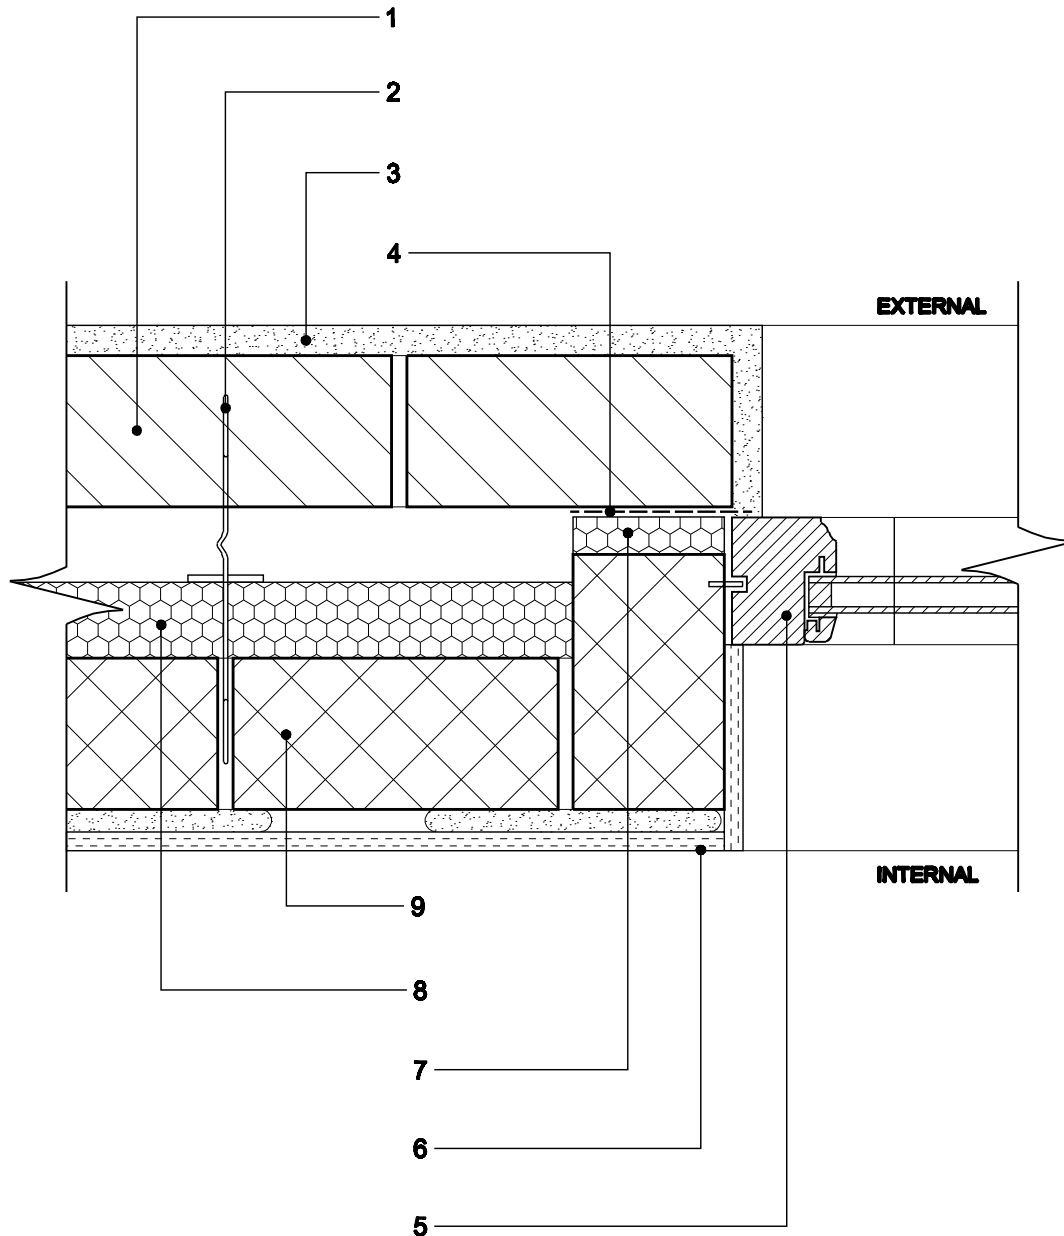

PROJECT	DRAWING TITLE Window Reveal Detail	DRAWING NO.	REVISION
copyright© The information is supplied in good faith and no liability can be accepted for any loss or damage resulting from use.	QUINN REF QL-TD-005	DATE	SCALE 1.5
	Quinn Group, Head Office, Derrylin, Co. Fermanagh, BT92 9AU Tel:+44 (0) 28 6774 8866 Fax: +44 (0) 28 6774 8800 Email: General Enquires: info@quinn-group.com Technical Enquires: technical@quinn-group.com		