


**KEY**

1. 20mm approved external render
2. 100mm Quinn Lite B5 blockwork
3. 40mm cavity
4. 60mm Quinn Therm QW insulation
5. Flexible wall tie, butterfly or double triangle - BS1234 1978 or EN 845-1
6. 150mm Quinn Lite B5 blockwork
7. 13mm lightweight plaster
8. Thin Joint Mortar

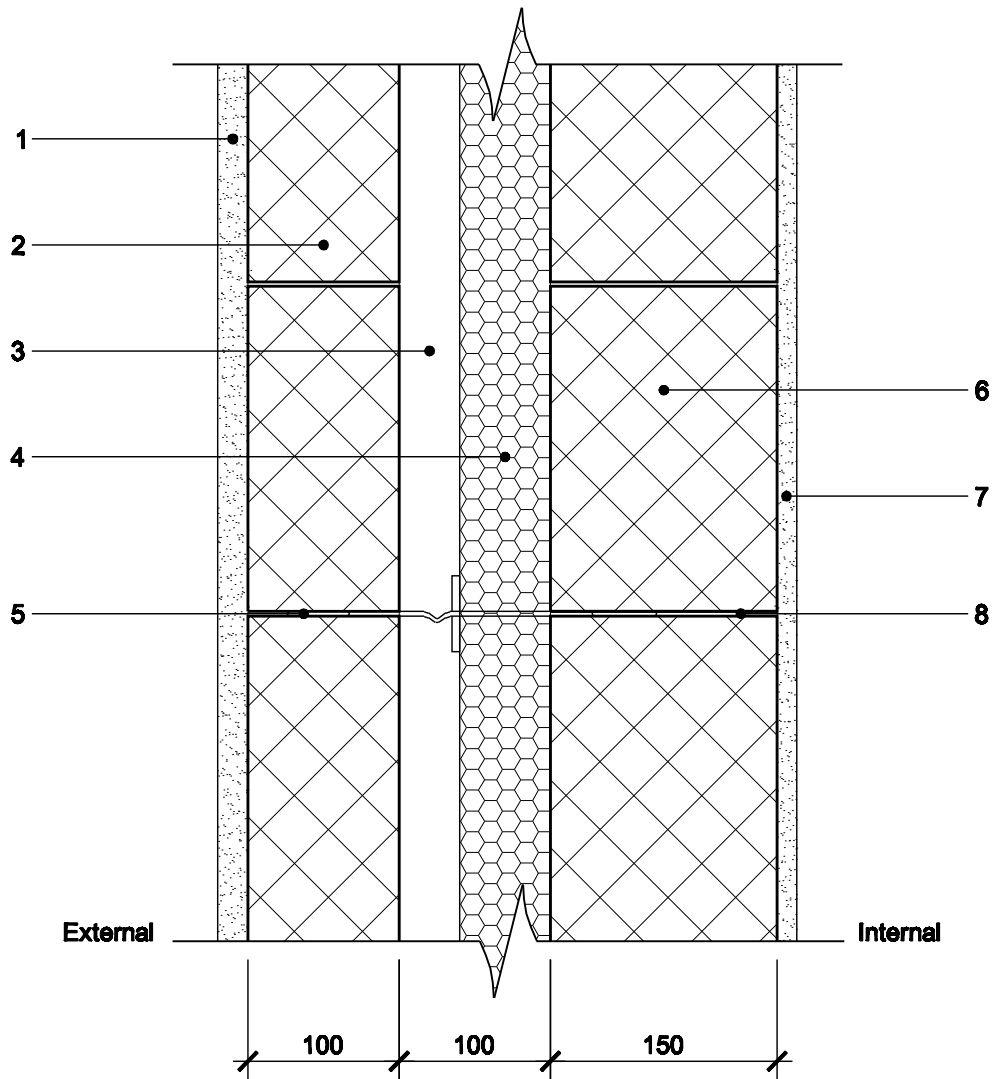

PROJECT	DRAWING TITLE Wall Construction using Quinn lite 150mm B5 to give a U-value of 0.20W/m <sup>2</sup> k	DRAWING NO.	REVISION
copyright© The information is supplied in good faith and no liability can be accepted for any loss or damage resulting from use.	QUINN REF QL-TD-027-01	DATE	SCALE 1.5

**QUINN**group

Quinn Group, Head Office, Derrylin, Co. Fermanagh, BT92 9AU  
 Tel: +44 (0) 28 6774 8866 Fax: +44 (0) 28 6774 8800 Email: General Enquires: info@quinn-group.com  
 Technical Enquires: technical@quinn-group.com